


Reliable performance
all year round

nokian
TRI 2



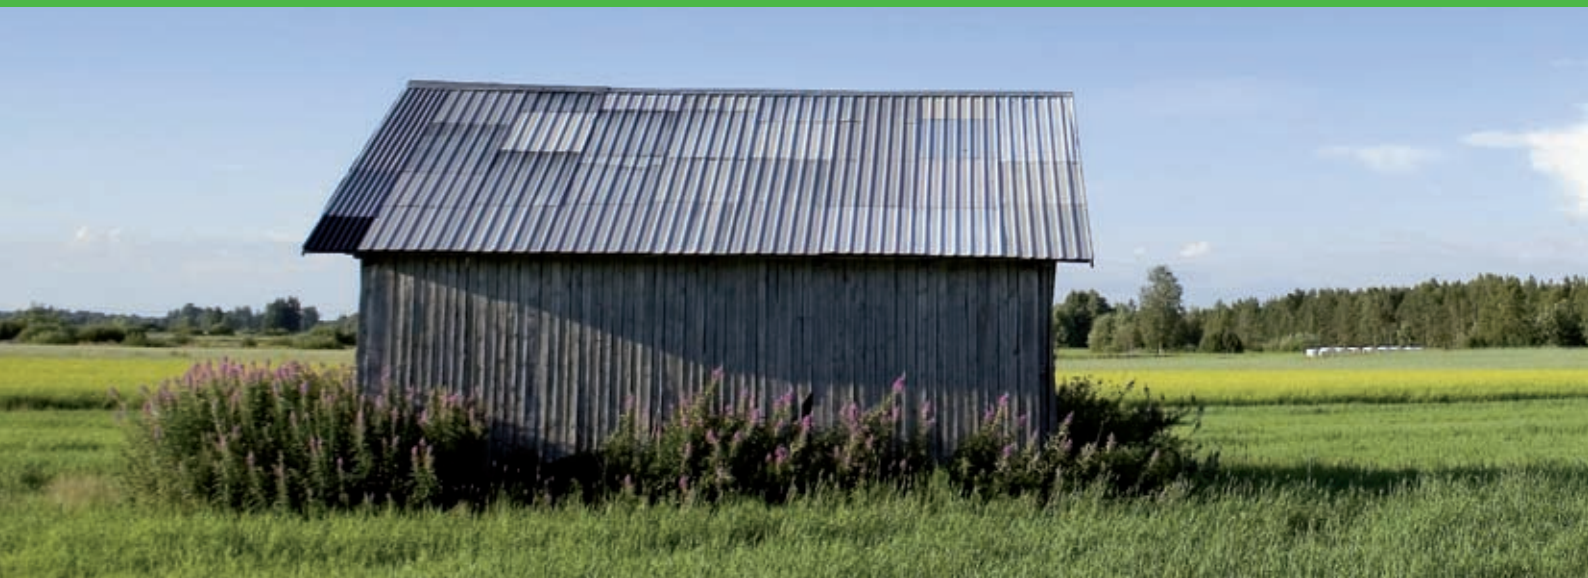

Nokian TRI 2

Reliable performance all year round

Nokian TRI 2 is a reliable partner for modern-day farmers and equipment contractors. Excellent grip, high load-bearing capacity and superior driving comfort facilitate both demanding transports and wintertime environmental maintenance. This environmentally friendly tyre, made of purified oils, is further enhanced by low tyre noise and a low rolling resistance, reducing fuel consumption.

Efficient working hours for versatile contracting

- › Unique wear resistance
- › Good self-cleaning

Comfortable on-road driving

- › Stable, car-like drive comfort
- › Excellently suited for on-road driving thanks to the speed category (max 65 km/h / 40 mph)



Only purified oils,
no toxic chemicals





Nokian TRI 2 RADIAL



| Size | LI / SS | Rim | Permitted rims | Width | | Diameter | | Loaded static radius | | Rolling circumference | | Inflation pressure | | Load capacity kg / lb | | | | Product code | | | | |
|---------------------------------------|---------|-------|---|---------|---------|-------------------|-------------------|----------------------|-------------------|-----------------------|------------------|--------------------|------------------|-----------------------|-------|------|-------|--------------|-------|------|-------|---------|
| | | | | mm / in | mm / in | mm±2.5% / in±2.5% | mm±2.5% / in±2.5% | mm±2.5% / in±2.5% | mm±2.5% / in±2.5% | kPa / p.s.i | 30 km/h / 20 mph | 40 km/h / 25 mph | 50 km/h / 30 mph | 65 km/h / 40 mph | | | | | | | | |
| 80-SERIES | | | | | | | | | | | | | | | | | | | | | | |
| 250/80R16 ¹⁾ | 119 G | W8 | W7, 7j, 7.5j, 8j, 8.5j, W9, 9, 9.00, 9j | 268 | 10.6 | 814 | 32.0 | 383 | 15.1 | 2488 | 98.00 | 450 | 65 | 1820 | 4010 | 1750 | 3860 | 1650 | 3640 | 1550 | 3415 | T845495 |
| 340/80R18 | 138 D | 11 | W10, W11, 12, W12 | 343 | 13.5 | 1001 | 39.4 | 453 | 17.8 | 3010 | 118.5 | 400 | 58 | 2840 | 6260 | 2725 | 6010 | 2570 | 5665 | 2360 | 5205 | T445391 |
| 360/80R20 | 143 D | 11 | W10, W11, 12, W12 | 357 | 14.1 | 1092 | 43.0 | 495 | 19.5 | 3280 | 129.1 | 400 | 58 | 3200 | 7055 | 3075 | 6780 | 2900 | 6395 | 2725 | 6010 | T445389 |
| 300/80R24 | 128 D | DW10 | W9, W10, W11, DW11 | 295 | 11.6 | 1090 | 42.9 | 499 | 19.6 | 3292 | 129.6 | 320 | 46 | 2150 | 4740 | 2060 | 4540 | 1940 | 4275 | 1800 | 3970 | T445419 |
| 340/80R24 | 135 D | DW11 | W10, W11, W12, DW10, DW12 | 343 | 13.5 | 1154 | 45.4 | 532 | 20.9 | 3487 | 137.3 | 320 | 46 | 2600 | 5730 | 2500 | 5510 | 2350 | 5180 | 2180 | 4805 | T445376 |
| 360/80R24 | 138 D | DW11 | W11, W12, W13, DW12, DW13 | 357 | 14.1 | 1186 | 46.7 | 542 | 21.3 | 3581 | 141.0 | 320 | 46 | 2840 | 6260 | 2725 | 6010 | 2570 | 5665 | 2360 | 5205 | T445378 |
| 400/80R24 | 144 D | DW13 | W12, W13, W14L, DW12, DW14L | 404 | 15.9 | 1250 | 49.2 | 568 | 22.4 | 3764 | 148.2 | 320 | 46 | 3380 | 7450 | 3250 | 7165 | 3060 | 6745 | 2800 | 6175 | T445372 |
| 440/80R24 | 149 D | DW14L | W15L, DW15L | 441 | 17.4 | 1314 | 51.7 | 596 | 23.5 | 3965 | 156.1 | 320 | 46 | 3900 | 8600 | 3750 | 8265 | 3540 | 7805 | 3250 | 7165 | T445385 |
| 400/80R28 | 146 D | DW13 | W12, W13, W14L, DW12, DW14L | 404 | 15.9 | 1351 | 53.2 | 620 | 24.4 | 4090 | 161.0 | 320 | 46 | 3600 | 7935 | 3450 | 7605 | 3260 | 7185 | 3000 | 6615 | T445383 |
| 440/80R28 | 151 D | DW14L | W15L, W16L, DW15L, DW16L | 441 | 17.4 | 1415 | 55.7 | 644 | 25.4 | 4266 | 168.0 | 320 | 46 | 4160 | 9170 | 4000 | 8820 | 3760 | 8290 | 3450 | 7605 | T445337 |
| 440/80R30 | 153 D | DW14L | DW15L, W16L | 441 | 17.4 | 1466 | 57.7 | 670 | 26.4 | 4430 | 174.4 | 320 | 46 | 4300 | 9480 | 4125 | 9095 | 3880 | 8555 | 3650 | 8045 | T445384 |
| 480/80R30 | 157 D | DW15L | DW16L, DW18L | 479 | 18.9 | 1530 | 60.2 | 694 | 27.3 | 4631 | 182.3 | 320 | 46 | 4940 | 10890 | 4750 | 10470 | 4480 | 9875 | 4125 | 9095 | T445386 |
| 440/80R34 | 155 D | DW14L | DW15L, DW16L | 441 | 17.4 | 1568 | 61.7 | 717 | 28.2 | 4750 | 187.0 | 320 | 46 | 4560 | 10055 | 4375 | 9645 | 4120 | 9085 | 3875 | 8545 | T445369 |
| 480/80R34 | 159 D | DW15L | DW16L, DW18L | 479 | 18.9 | 1632 | 64.3 | 743 | 29.3 | 4939 | 194.4 | 320 | 46 | 5200 | 11465 | 5000 | 11025 | 4700 | 10360 | 4375 | 9645 | T445370 |
| 480/80R38 | 161 D | DW15L | DW16L, DW18L | 479 | 18.9 | 1733 | 68.2 | 793 | 31.2 | 5265 | 207.3 | 320 | 46 | 5520 | 12170 | 5300 | 11685 | 5000 | 11025 | 4625 | 10195 | T445377 |
| 540/80R38 | 167 D | DW18L | DW16L | 550 | 21.7 | 1829 | 72.0 | 834 | 32.8 | 5529 | 217.7 | 320 | 46 | 6600 | 14550 | 6300 | 13890 | 5940 | 13095 | 5450 | 12015 | T445338 |
| 70-SERIES | | | | | | | | | | | | | | | | | | | | | | |
| 500/70R24 ¹⁾ (19.5LR24) | 159 D | DW16L | DW15L, DW18L | 503 | 19.8 | 1310 | 51.6 | 585 | 23.0 | 3958 | 155.8 | 400 | 58 | 5200 | 11465 | 5000 | 11025 | 4700 | 10360 | 4375 | 9645 | T445467 |
| 65-SERIES | | | | | | | | | | | | | | | | | | | | | | |
| 420/65R24 | 146 D | DW13 | W12, W13, W14L, DW12, DW14L, DW15L | 418 | 16.5 | 1156 | 45.5 | 525 | 20.7 | 3493 | 137.5 | 400 | 58 | 3600 | 7935 | 3450 | 7605 | 3260 | 7185 | 3000 | 6615 | T445392 |
| 460/65R24 | 151 D | DW14L | W15L, W16L, DW15L, DW16L | 454 | 17.9 | 1208 | 47.6 | 550 | 21.7 | 3638 | 143.2 | 400 | 58 | 4160 | 9170 | 4000 | 8820 | 3760 | 8290 | 3450 | 7605 | T445393 |
| 540/65R24 | 154 D | DW18L | DW16L | 550 | 21.7 | 1312 | 51.7 | 587 | 23.1 | 3952 | 155.6 | 320 | 46 | 4420 | 9745 | 4250 | 9370 | 4000 | 8820 | 3750 | 8265 | T445420 |
| 480/65R28 | 149 D | DW15L | DW14L, DW16L | 479 | 18.9 | 1335 | 52.6 | 604 | 23.8 | 4040 | 159.1 | 320 | 46 | 3900 | 8600 | 3750 | 8265 | 3540 | 7805 | 3250 | 7165 | T445444 |
| 540/65R28 | 155 D | DW18L | DW16L | 550 | 21.7 | 1413 | 55.6 | 641 | 25.2 | 4273 | 168.2 | 320 | 46 | 4680 | 10320 | 4500 | 9920 | 4240 | 9350 | 3875 | 8545 | T445442 |
| 540/65R30 | 156 D | DW18L | DW16L | 550 | 21.7 | 1464 | 57.6 | 667 | 26.3 | 4417 | 173.9 | 320 | 46 | 4820 | 10625 | 4625 | 10195 | 4360 | 9610 | 4000 | 8820 | T445371 |
| 600/65R38 | 166 D | DW18L | DW20B | 591 | 23.3 | 1745 | 68.7 | 790 | 31.1 | 5290 | 208.3 | 320 | 46 | 6250 | 13780 | 6000 | 13230 | 5640 | 12435 | 5300 | 11685 | T445445 |
| 650/65R38 | 170 D | DW20B | DW18L, DW23B | 645 | 25.4 | 1811 | 71.3 | 819 | 32.2 | 5510 | 216.9 | 320 | 46 | 7200 | 15875 | 6900 | 15210 | 6500 | 14330 | 6000 | 13230 | T445443 |
| 650/65R42 | 171 D | DW20A | DW18L, DW23A | 645 | 25.4 | 1913 | 75.3 | 873 | 34.4 | 5799 | 228.3 | 320 | 46 | 7400 | 16315 | 7100 | 15655 | 6700 | 14770 | 6150 | 13560 | T445390 |

> NEW ¹⁾ SB = steel belted



| TRI 2 dimension | Standard size | TRI 2 dimension | Standard size |
|-----------------|---------------|-----------------|---------------|
| 340/80R18 | 12.5R18 | 480/80R38 | 18.4R38 |
| 360/80R20 | 14.5R20 | 540/80R38 | 20.8R38 |
| 300/80R24 | 11.2R24 | 500/70R24 | 19.5LR24 |
| 340/80R24 | 12.4R24 | 420/65R24 | |
| 360/80R24 | 13.6R24 | 460/65R24 | |
| 400/80R24 | 14.9R24 | 540/65R24 | |
| 440/80R24 | 16.9R24 | 480/65R28 | |
| 400/80R28 | 14.9R28 | 540/65R28 | |
| 440/80R28 | 16.9R28 | 540/65R30 | |
| 440/80R30 | 16.9R30 | 600/65R38 | |
| 480/80R30 | 18.4R30 | 650/65R38 | |
| 440/80R34 | 16.9R34 | 650/65R42 | |
| 480/80R34 | 18.4R34 | | |



A forerunner in special tyres

The unique qualities of Nokian Heavy Tyres arise from the knowledge of extreme usage conditions and respect for nature. We also lead a continuous, close dialogue with our customers.

We are passionate about developing even more functional solutions and tools for forest, field, road, terminal and mine work. Relying on our persistence and creativity, we can ensure you safe and efficient work. We provide flexible service in all cases to help you achieve your goals.

nokian HEAVY TYRES

Nokian Heavy Tyres Ltd
P.O. Box 20
FI-37101 NOKIA
Finland

Tel. +358 10 401 7000
Fax +358 10 401 7318
info@nokiantyres.com

Nokian Tyres Inc.
1945 Main Street
Colchester, VT 05446
USA

Tel. +1 800 565 2525
Fax +1 802 857 0329
northamerica@nokiantyres.com

Nordic Tyres (UK) Ltd
Unit 2 Sydney Place
Lockerbie, Dumfriesshire DG11 2JA
United Kingdom

Tel. 44 (0) 1576 203 020
Fax 44 (0) 1576 203 029
lindsay@nordic-tyres.demon.co.uk

www.nokiantyres.com/heavytyres