

## LI-SI ON TAURUS RADIAL TYRES




- ★ 160 kPa (1.6 bar)
- ★★ 240 kPa (2.4 bar)
- ★★★ 320 kPa (3.2 bar)
- ★★★★ 360 kPa (3.6 bar)

### SPEED INDEX SPEED (KM/H)

A2	10
A5	25
A6	30
A8	40
B	50

### CONVERSION TABLE OF UNITS:

1 centimetre	cm	= 0.3937"
1 inch	inch	= 2.54 cm
1 metre	m	= 3.281 ft
1 foot	ft	= 0.3048 m
1 kilometre	km	= 0.6214 mile
1 mile	mile	= 1.6093 km
1 litre		= 0.21 imp. Gall
1 imperial gallon	imp. Gall	= 4.55 litre
1 kilogram	kg	= 2.205 lb
		= 1 daN
1 pound	lb	= 0.454 kg
1 bar	bar	= 100 kPa

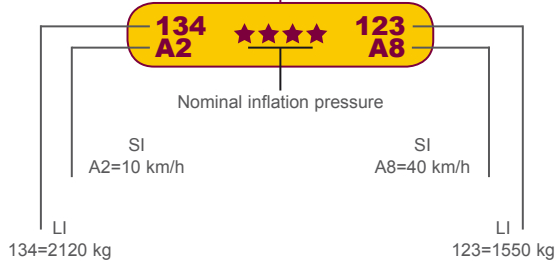

## SYSTEM OF LOAD INDICES

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
84	500	103	875	122	1500	141	2575	160	4500	179	7750
85	515	104	900	123	1550	142	2650	161	4625	180	8000
86	530	105	925	124	1600	143	2725	162	4750	181	8250
87	545	106	950	125	1650	144	2800	163	4875	182	8500
88	560	107	975	126	1700	145	2900	164	5000	183	8750
89	580	108	1000	127	1750	146	3000	165	5150	184	9000
90	600	109	1030	128	1800	147	3075	166	5300	185	9250
91	615	110	1060	129	1850	148	3150	167	5450	186	9500
92	630	111	1090	130	1900	149	3250	168	5600	187	9750
93	650	112	1120	131	1950	150	3350	169	5800	188	10000
94	670	113	1150	132	2000	151	3450	170	6000	189	10300
95	690	114	1180	133	2080	152	3550	171	6150	190	10600
96	710	115	1215	134	2120	153	3650	172	6300	191	10900
97	730	116	1250	135	2180	154	3750	173	6500	192	11200
98	750	117	1285	136	2240	155	3875	174	6700	193	11500
99	775	118	1320	137	2300	156	4000	175	6900	194	11800
100	800	119	1360	138	2380	157	4125	176	7100	195	12150
101	825	120	1400	139	2430	158	4250	177	7300		
102	850	121	1450	140	2500	159	4375	178	7500		



## PRODUCT RANGE 2015



POINT 8      POINT 70      POINT 65      RC 95





## TAURUS POINT 8

### Standard

- Standard section tyres with up-to-date profile
- New appearance
- Tubeless

20	11.2 R 20 TL 111 A8 108 B POINT 8
24	11.2 R 24 TL 114 A8 111 B POINT 8
	12.4 R 24 TL 119 A8 116 B POINT 8
	13.6 R 24 TL 121 A8 118 B POINT 8
28	14.9 R 24 TL 126 A8 123 B POINT 8
	16.9 R 24 TL 134 A8 131 B POINT 8
	11.2 R 28 TL 116 A8 113 B POINT 8
30	12.4 R 28 TL 121 A8 118 B POINT 8
	13.6 R 28 TL 123 A8 120 B POINT 8
	14.9 R 28 TL 128 A8 125 B POINT 8
	16.9 R 28 TL 136 A8 133 B POINT 8
32	14.9 R 30 TL 129 A8 126 B POINT 8
	16.9 R 30 TL 137 A8 134 B POINT 8
	18.4 R 30 TL 142 A8 139 B POINT 8

32	12.4 R 32 TL 122 A8 119 B POINT 8
34	16.9 R 34 TL 139 A8 136 B POINT 8
	18.4 R 34 TL 144 A8 141 B POINT 8
36	12.4 R 36 TL 124 A8 121 B POINT 8
	13.6 R 36 TL 127 A8 124 B POINT 8
38	13.6 R 38 TL 128 A8 125 B POINT 8
	16.9 R 38 TL 141 A8 138 B POINT 8
	18.4 R 38 TL 146 A8 143 B POINT 8
	20.8 R 38 TL 153 A8 150 B POINT 8
42	20.8 R 42 TL 155 A8 152 B POINT 8



## TAURUS POINT 65

### Series 65

- New soil protecting tread pattern
- Lower inflation pressure
- Good yield
- Tubeless

28	480/65 R 28 TL 129 A8 126 B POINT 65
	540/65 R 28 TL 137 A8 134 B POINT 65
30	540/65 R 30 TL 143 A8 143 B POINT 65

38	540/65 R 38 TL 142 A8 139 B POINT 65
	600/65 R 38 TL 147 A8 144 B POINT 65
42	650/65 R 38 TL 154 A8 151 B POINT 65
	650/65 R 42 TL 158 A8 158 B POINT 65



## TAURUS POINT 70

### Series 70

- The advantages of a wider tyre for working in the fields: Improved traction, reduced rutting
- Extra robust for farm work: Greater load capacity, high resistance to separation
- Tubeless

24	320/70 R 24 TL 116 A8 116 B POINT 70
	360/70 R 24 TL 122 A8 122 B POINT 70
	380/70 R 24 TL 125 A8 125 B POINT 70
	420/70 R 24 TL 130 A8 130 B POINT 70
28	480/70 R 24 TL 138 A8 138 B POINT 70
	360/70 R 28 TL 125 A8 125 B POINT 70
	380/70 R 28 TL 127 A8 127 B POINT 70
	420/70 R 28 TL 133 A8 133 B POINT 70
42	480/70 R 28 TL 140 A8 140 B POINT 70

30	480/70 R 30 TL 141 A8 141 B POINT 70
34	480/70 R 34 TL 143 A8 143 B POINT 70
	520/70 R 34 TL 148 A8 148 B POINT 70
38	480/70 R 38 TL 145 A8 145 B POINT 70
	520/70 R 38 TL 150 A8 150 B POINT 70
	580/70 R 38 TL 155 A8 155 B POINT 70



## TAURUS RC 95

### Soilsaver

- Suitable to cultivate row crops
- Increases utilisation of crop land
- Protects plants
- Tubeless

32	230/95 R 32 126 A8 126 B**** TL RC 95
	270/95 R 32 134 A8 134 B**** TL RC 95
36	230/95 R 36 128 A8 128 B**** TL RC 95
	270/95 R 36 137 A8 137 B**** TL RC 95
38	270/95 R 38 138 A8 138 B**** TL RC 95
42	270/95 R 42 140 A8 140 B**** TL RC 95

44	230/95 R 44 132 A8 132 B**** TL RC 95
	270/95 R 44 141 A8 141 B**** TL RC 95
46	300/95 R 46 146 A8 146 B**** TL RC 95
48	230/95 R 48 134 A8 134 B**** TL RC 95
	340/85 R 48 151 A8 151 B**** TL RC 95
	270/95 R 48 142 A8 142 B**** TL RC 95

Note: \*Calculated value. \*\*Measured value